Pump Dimensions

DIMENSIONS IN [MILLIMETERS] INCHES

NOTE: FIBER OPTIC CABLES REQUIRE A MINIMUM 1" (25.4mm) RADIUS ON ALL BENDS

FIBER OPTIC STROKE DETECT

[210] 8.3

[111] 4.4

[35] 1.4

[62] 2.5

[51] 2.0

MOUNT BASE PLATE 2 EA. 3/8" (10 mm) SOCKET HEAD CAP SCREWS

[14] .6

[57] 2.2

[116] 4.6

[32] 1.3

[126] 5.0

[16] .6

[21] .8
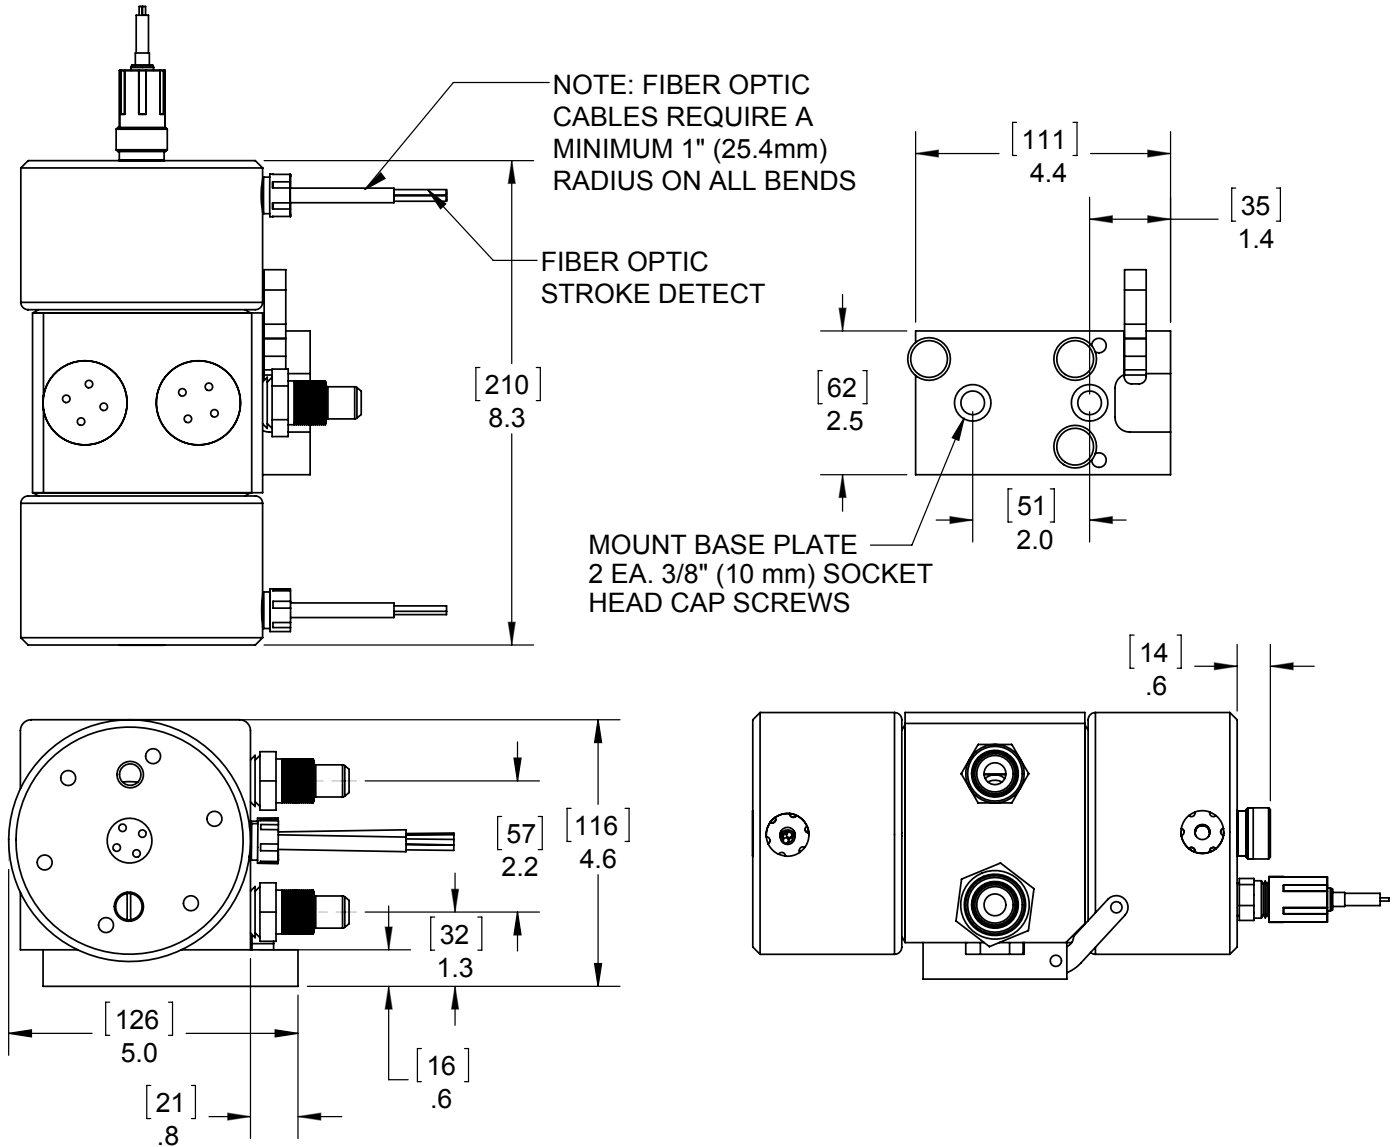
wkfluidhandling.com/plf30

Our engineers are easy to work with and ready to perform your custom testing.
Contact us at info@wkfluidhandling.com or 435.783.6040, or visit wkfluidhandling.com

Published July 17, 2013 | All specifications are subject to change without notice.

© 2013 White Knight Fluid Handling, Inc.