


**Standard Configuration**

**AP40EXT3 - A A A A - A A A A - A A B**

0 1 2 3 4 5 6 7 8 9 10 11

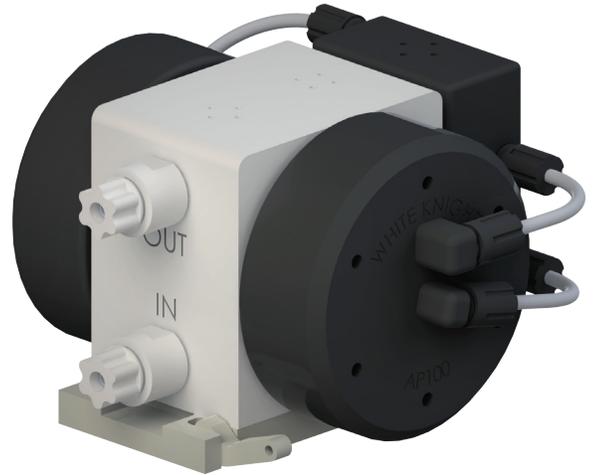

Standard Options		
0.	Standard model with 3-year extended warranty	AP40EXT3
1.	Front Straight Liquid Inlet Style	A
2.	Front Straight Liquid Outlet Style	A
3.	1/2 in. Synchro-Flare Liquid Inlet	A
4.	1/2 in. Synchro-Flare Liquid Outlet	A
5.	1/4 in. FNPT Ell Air Supply Inlet	A
6.	Ceramic Shuttle Valve with Internal Mufflers	A
7.	Whisper Non-adjustable Muffler	A
8.	No Pulse Dampener	A
9.	No Stroke Detection	A
10.	No Leak Detection	A
11.	Lever-Lock Base Plate	B

**Catcher™ Pre-Filter Accessory: PFII050-A**

White Knight Catcher™ pre-filters protect pumps from wafer shards and other harmful solids. They can be cleaned without disconnecting liquid lines. The PFII050-A is the standard pump-mounted model for 30 lpm (8 gpm) pumps. It has a 0.043-in screen orifice and 1/2 in. Synchro-Flare fittings.

<https://wkfluidhandling.com/catchers/>

